



ADSL2/2+ Ethernet Modem Router

DSL705E combines the function of a high-speed DSL modem with router for high data transmission rate of up to 25Mbps.

Ideal as a no-frills networking solution, DSL705E is equipped with dual mode functions – Bridge mode for Single user and Router mode for multi-user sharing of ADSL line. Promising a user-friendly and fuss-free experience, only a 3-click Easy Set-up is needed!

DSL705E comes in a stylish and compact life-style design that can be used when placed in a horizontal, vertical or wall-mount position.

DSL Broadband Connection

Digital Subscriber Line (DSL) establishes quickly to the Internet for you unlike a dial-up service. With DSL, you can surf the Internet, chat online and check email at a faster speed. You can also share high quality digital pictures, video and music files with friends and family without lag.

Connect to ADSL for High-speed Broadband

Fig 1: Basic Setup



Fig 2: Advanced Setup with Wireless Router



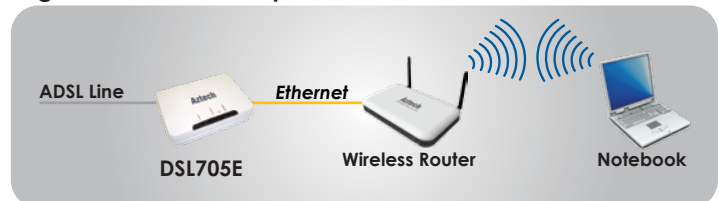


Fig 3: Advanced Setup with HomePlug Applications

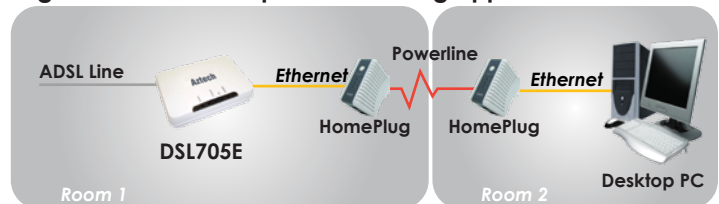

Features

- Stay connected to the Internet with the latest ADSL2/2+ standards
- NAT application level available for web servers, online gaming and VPN
- Multiple Session IP Sec and PPTP/L2TP VPN pass through
- Sleek, clean design that saves space in your apartment or office

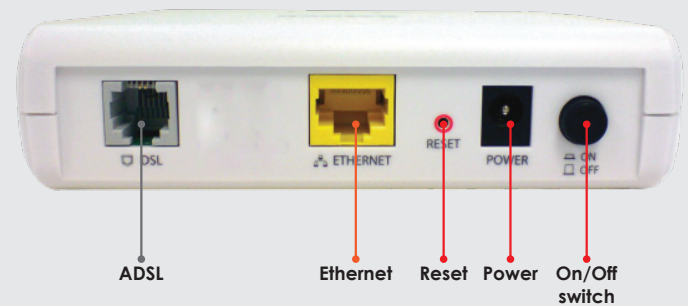

Specifications

Ports	1 x Power	1 x DSL	1 x Ethernet				
Button	Reset	On/Off					
LED Indicators	1 x Power	1 x DSL	1 x Internet	1 x Ethernet			
Management Support	Web-based management GUI		Save/Restore Router configuration	Firmware Upgrades via Web GUI	TR-069 support		
Security	Firewall: intrusion logging and reporting			Mode of operation: Network Address Translation (NAT)			
Network Support	Static routing with TCP/ IP, VPN pass-through (IPSec, L2TP, PPTP) RIP PPPoE PPPoA DNS DHCP (client & server)						
Physical Interfaces	LAN Ports: 1 x 10/100 Mbps AutoMDI/MDIX			ADSL Port: ADSL RJ-11, T1.413, G.DMT, G.Lite, ADSL2+, ITU Annex A			
Operating Systems	Microsoft Windows® Vista®, XP®, 7®						
Power Adaptor	12VDC, 0.42A						
Environment	Operating: 0°C to 40°C		Storage: -25°C to 70°C	Operating Humidity: 30% to 80% Humidity (Non-Condensing)			
	Storage Humidity: 30% to 95% Humidity (Non-Condensing)						
Physical Dimensions	Weight: 210g		Dimensions: 126(L) x 86(W) x 28(H) mm				
Package Includes	DSL705E	1 x Power adapter	1 x RJ-45	1 x RJ-11	1 x ADSL splitter	1 x Resource CD	1 x Easy Start Guide